
*Dane produktu*
*Charakterystyki*

# ZB5AD205

Przełącznik 2 pozycyjny żółty stabilny piórko krótkie plastikowy

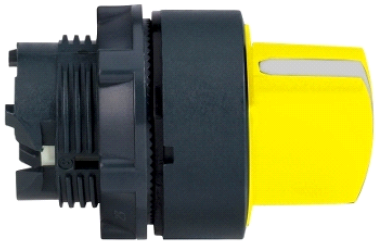

## Główne

| | |
|---|---|
| Gama produktów | Harmony XB5 |
| Typ produktu lub komponentu | Główka przełącznika |
| Skrócona nazwa urządzenia | ZB5 |
| Materiał maskownicy | Dark grey plastic |
| Średnica montażowa | 22 mm |
| Typ głowicy | Standard |
| Sprzedaż zgodnie z niepodzielną liczbą | 1 |
| Kształt główki elementu sygnalizacyjnego | Okrągły |
| Typ elementu napędowego | Stabilny - położenie zaryglowane |
| Rodzaj elementu napędowego | Żółty Standardowe pokrętło |
| Położenie elementu napędowego | 2 położenia 90° |

## Uzupełnienie

| | |
|---|---|
| CAD szerokość całkowita | 29 mm |
| CAD wysokość całkowita | 29 mm |
| CAD głębokość całkowita | 46 mm |
| Masa produktu | 0.017 kg |
| Trwałość mechaniczna | 1000000 cykli |
| Nazwa stacji | XALD 1...5 wycięcia<br>XALK 2...5 wycięcia |
| Kod składu elektrycznego | C15 dla 1 zestyki z użyciem pojedynczy bloki w montaż z przodu<br>C15 dla 1 zestyki z użyciem pojedynczy bloki w montaż z przodu<br>C11 for 3 contacts using single blocks in front mounting<br>SF1 dla 3 zestyki z użyciem pojedynczy bloki w montaż z przodu<br>C7 dla 4 zestyki z użyciem pojedynczy bloki w montaż z przodu<br>C8 dla 4 zestyki z użyciem pojedyncze lub podwójne bloki w montaż z przodu<br>SR1 dla 3 zestyki z użyciem pojedynczy bloki w montaż z tyłu<br>C4 dla 6 zestyki z użyciem pojedyncze lub podwójne bloki w montaż z przodu<br>C5 dla 5 zestyki z użyciem pojedynczy bloki w montaż z przodu<br>C6 dla 5 zestyki z użyciem pojedyncze lub podwójne bloki w montaż z przodu<br>C3 dla 6 zestyki z użyciem pojedynczy bloki w montaż z przodu |

## Środowisko

| | |
|---|---|
| Pokrycie ochronne | TH |
| Temepratura otoczenia dla przechowywania | -40...70 °C |
| temperatura otoczenia dla pracy urządzenia | -40...70 °C |
| kategoria przepięć | Klasa 2 zgodnie z IEC 60536 |
| stopień ochrony IP | IP67 zgodnie z IEC 60529<br>IP69K<br>IP69 zgodnie z IEC 60529 |
| stopień ochrony NEMA | NEMA 13<br>NEMA 4X |
| Odporność na myjkę wysokociśnieniową | 7000000 Pa w 55 °C, odległość: 0.1 m |
| stopień ochrony IK | IK06 zgodnie z IEC 50102 |
| Normy | EN/IEC 60947-1<br>EN/IEC 60947-5-1<br>EN/IEC 60947-5-4<br>JIS C 4520 |


Informacje zawarte w tej dokumentacji zawiera ogólne opisy lub charakterystyki technicznej wykonania produktów zawartych w niniejszym dokumencie. Dokumentacja ta nie jest przeznaczona jako substytut i nie może być stosowana do określenia przydatności lub niezawodności tych produktów dla konkretnych aplikacji użytkownika. Obowiązkiem każdego takiego użytkownika lub integratora jest wykonanie odpowiedniej i pełnej analizy ryzyka, oceny i testowania produktów w odniesieniu do określonej aplikacji lub odpowiedniego stosowania korzystania z niej. Ani Schneider Electric Industries SAS, ani żaden z jej oddziałów lub spółek zależnych są ponosi odpowiedzialności za niewłaściwe wykorzystanie informacji w nim zawartych.

| | |
|---|---|
| | UL 508<br>CSA C22.2 Nr 14 |
| certyfikaty produktu | BV<br>CSA<br>DNV<br>GL<br>LROS (Lloyds register of shipping)<br>RINA<br>Z certyfikatem UL |
| odporność na wibracje | 5 gn (f = 2...500 Hz) zgodnie z IEC 60068-2-6 |
| Odporność na wstrząsy | 30 gn (czas trwania = 18 ms) dla przyspieszenie półfali sinusoidy zgodnie z IEC 60068-2-27<br>50 gn (czas trwania = 11 ms) dla przyspieszenie półfali sinusoidy zgodnie z IEC 60068-2-27 |

## Contractual warranty


| | |
|---|---|
| Okres | 18 miesięcy |

## Dimensions




## Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

### Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

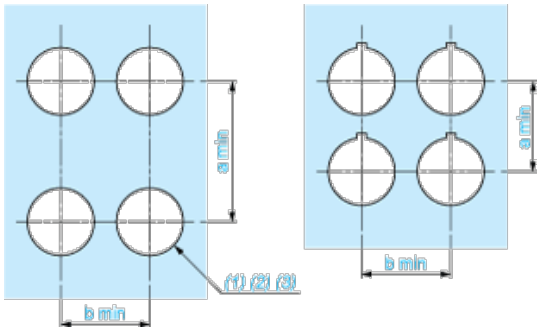



**(1)** Diameter on finished panel or support

**(2)** For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.

**(3)** Ø22.5 mm recommended (Ø22.3 $_{0}^{+0.4}$) / Ø0.89 in. recommended (Ø0.88 in. $_{0}^{+0.016}$)

| Connections | a in mm | a in in. | b in mm | b in in. |
|---|---|---|---|---|
| By screw clamp terminals or plug-in connector | 40 | 1.57 | 30 | 1.18 |
| By Faston connectors | 45 | 1.77 | 32 | 1.26 |
| On printed circuit board | 30 | 1.18 | 30 | 1.18 |

### Detail of Lug Recess





**(1)** Diameter on finished panel or support

**(2)** For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.

**(3)** Ø22.5 mm recommended (Ø22.3 $_{0}^{+0.4}$) / Ø0.89 in. recommended (Ø0.88 in. $_{0}^{+0.016}$)

## Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

### Panel Cut-outs (Viewed from Installer's Side)

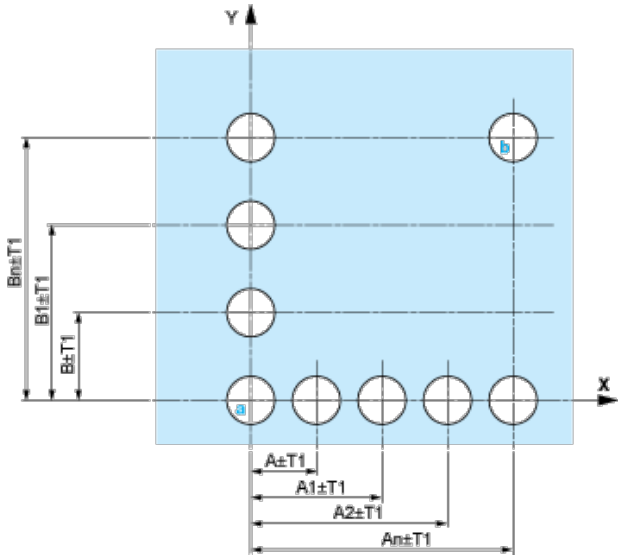



**A:** 30 mm min. / 1.18 in. min.

**B:** 40 mm min. / 1.57 in. min.

### Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)


Dimensions in mm

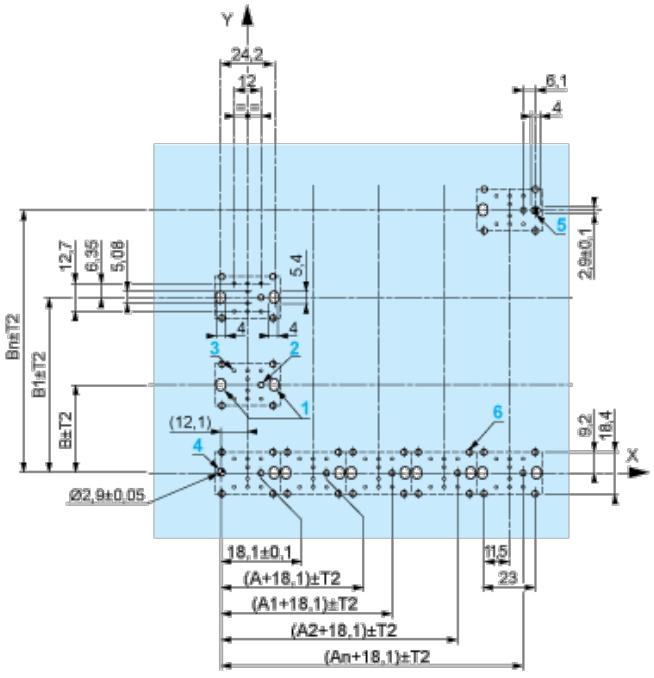


**A:** 30 mm min.

**B:** 40 mm min.

Dimensions in in.

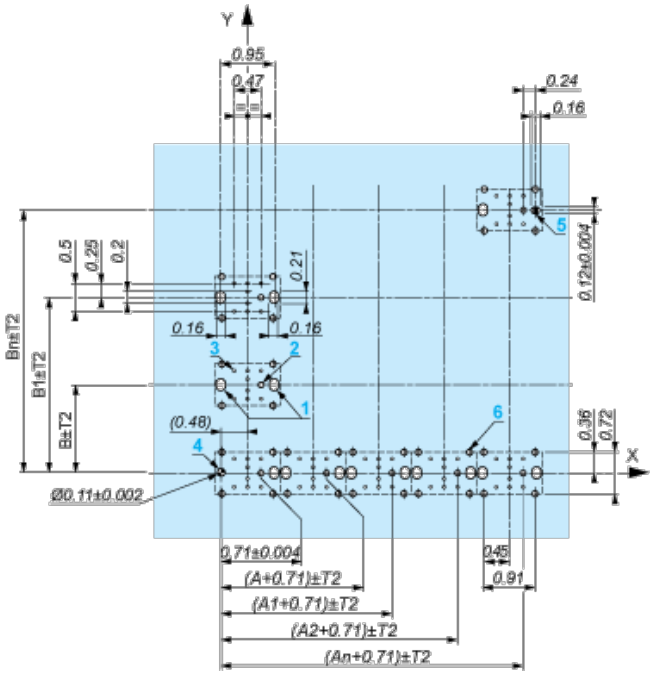


**A:** 1.18 in. min.

**B:** 1.57 in. min.


### General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

### Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB5AZ009: ± 2°30’ (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
  - every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - with each selector switch head (ZB5AD•, ZB5AJ•, ZB5AG•).

The fixing centers marked **a** and **b** are diagonally opposed and must align with those marked **4** and **5**.

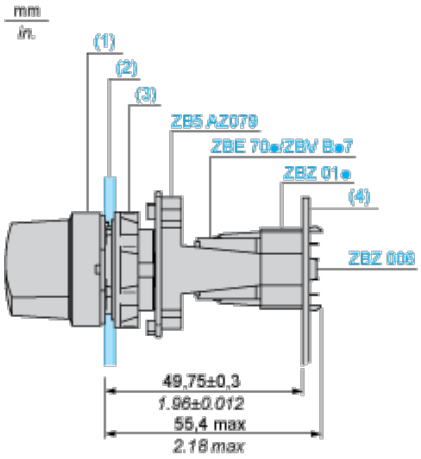


**(1)** Head ZB5AD•

**(2)** Panel

**(2)** Nut

**(4)** Printed circuit board

### Mounting of Adapter (Socket) ZBZ01•

- **1** 2 elongated holes for ZBZ006 screw access
- **2** 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ01•
- **3** 8 × Ø 1.2 mm / 0.05 in. holes
- **4** 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked **a**)


- **5** 1 elongated hole for aligning the printed circuit board (with cut-out marked **b**)
- **6** 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 holes for centring adapter ZBZ01•.


## Electrical Composition Corresponding to Code C3




## Electrical Composition Corresponding to Code C4




## Electrical Composition Corresponding to Code C5




## Electrical Composition Corresponding to Code C6




## Electrical Composition Corresponding to Code C7



## Electrical Composition Corresponding to Code C8




## Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1



## Electrical Composition Corresponding to Code C15


1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



## Legend

Single contact



Double contact



Light block



Possible location



## Sequence of Contacts Fitted to 2-position Selector Switch Body

**Position 315°**

315°



| | | | | | |
|---|---|---|---|---|---|
| **Push** | Position | Top | | | |
| | | Bottom | | | |
| | Location | | Left | Centre | Right |
| | State | | 0 | 0 | 0 |
| **Contacts** | N/O | | open | open | open |
| | N/C | | closed | closed | closed |

**Position 45°**




| | | | | | |
|---|---|---|---|---|---|
| **Push** | Position | Top | | | |
| | | Bottom | | | |
| | Location | | Left | Centre | Right |
| | State | | 1 | 1 | 1 |
| **Contacts** | N/O | | closed | closed | closed |
| | N/C | | open | open | open |